Yealink

EMBRACE A NEW ERA OF INTELLIGENT TEAMS ROOMS

A New-Gen of MVC Series for Microsoft Teams Rooms on Windows



Take Your Teams Rooms to A Higher Level Of Equity

Driven by cutting-edge Al technology, the new generation of the MVC series aims to elevate collaboration to a whole new level, providing a seamless face-to-face communication experience.

Multi-Stream People Feed

- No one is hidden from view with a 360° panoramic view
- A 10K camera for stunning images
- Individual video feeds of 4 in-room participants, ensuring everyone appears front and center





Multi-Camera Intelliframe

- Focus on the latest 4 active speakers to ensure natural conversations
- Fast and precise tracking for a seamless meeting flow





Voice and Face Recognition

- Connect peers by associating names with faces and speeches.
- Enjoy automatic speech-to-text transcription with speakers identified by their names





Copilot Integration

- Keep up on action items with Al-generated tasks (coming soon)
- Get a summary of every meeting
- Review content that's most relevant to you
- Translate meeting captions






*Customizable Name

Equally Heard

Thanks to full-duplex voice communication technology, all participants in the video meeting can speak simultaneously, enabling the free expression of ideas without any obstacles.

Clearly Heard

Yealink's Al Noise Proof Technology enhances the audio experience by leveraging a vast deep-learning sound database to reduce background noises, distracting keyboard clatter, mouse clicks, and footsteps. It also intelligently eliminates other ambient noises, providing crystal-clear audio quality.

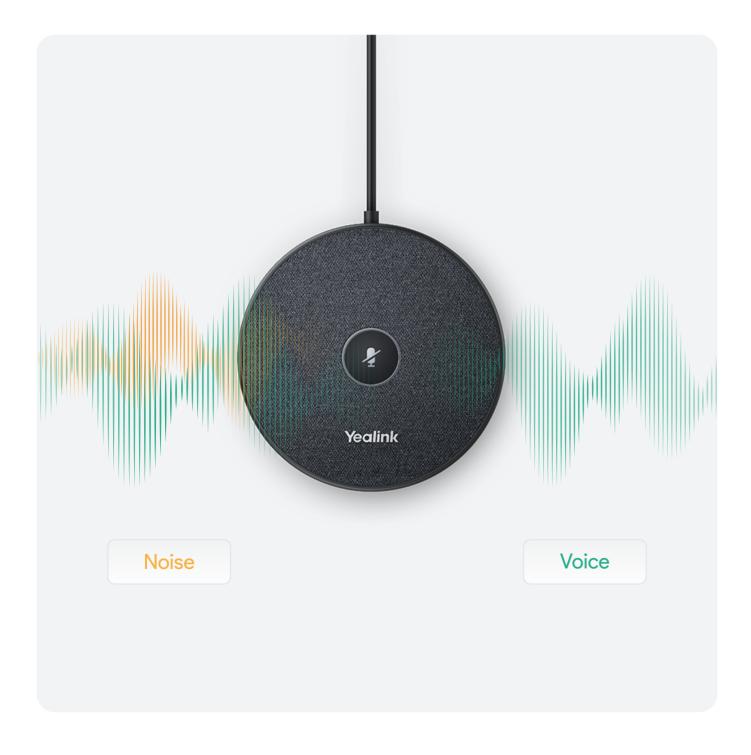

Take Your Teams Rooms to A Higher Level Of Flexibility

Experience premier audiovisual and room control with Yealink's new generation of the MVC series, which is suitable for rooms of any size. Paired with industry-leading audio and control system providers, our intelligent camera solution delivers a professional-grade meeting experience across diverse rooms and scenarios.



Divisible Rooms

- · Simple operation, reducing the time for IT manual deployment.
- · Supports independent deployment without relying on third-party ProAV products

Boardrooms

- · Make strategic decisions with simple but powerful solutions
- \cdot Seamless pro-grade meeting and control experience



Training Rooms

- · Stay focused during department gatherings with Presenter Tracking in multiple modes
- · Different angles with multi-camera
- Flexible audio options with Shure, Biamp, Extron, etc.



Flexible Audio with Third-Party Solution

Compatible with multiple third-party audio options, providing more flexible audio solutions



Integrated Room Automation Solution

Tap into smart building ecosystems to create the perfect meeting environment



Easy Content Sharing without Download

Multiple content sharing protocols, no need to download and install any apps, enabling wireless sharing for systems such as Windows, macOS, iOS, Android, etc.











Miracast* AirPlay* Google Cast* WPP30



Easy Control without Limits

The multi-touch panel solution and multiple deployment options offer greater convenience in meeting and room control, eliminating the need to physically move the touch panel.







The 3rd-Gen MVC Base Kit



MCore Pro Upgrade Highlights

- · Faster processing speed
- · 3x HDMl out supporting 21:9 displays
- Built-in CEC chip
- Built-in EDID module

MTouch Plus Upgrade Highlights

- · 11-inch touch screen
- Multiple deployment options
- Optional PD power supply for powering laptops when sharing screens
- · Available in two colors

Includes:

- · MCore Pro mini-PC
- · MTouch Plus touch console
- RoomSensor

MVC S60 For Medium Rooms (7-11 people)





Performance and Specs

- · 4x Intel Movidius + 1x Nvidia 128-core GPU
- · 17 tops Al computing power
- · 10K camera module
- · 6+1 circular array microphones for Al 6 array microphones for meetings

Intelligent Features

- Equal layout and multi-stream
- People Identification
- · Intelligent audio features
- · Supported Copilot

Includes:

- · MCore Pro mini-PC
- · MTouch Plus touch console
- · SmartVision 360° intelligent camera
- · RoomSensor

MVC860 For Large Rooms (11-20 people)





Smart 4K Tracking Experience

- · 4K sensor and 12x optical zoom
- Intelligent video features
 (Auto Framing/Speaker Tracking/ Presenter Tracking/Multi-Focus/ Video Fence)
- · Auto-privacy protection

Flexible Audio System

Recommended audio devices including Yealink VCM35 wired microphone, VCM38 ceiling microphone and VCM36 wireless microphone for different demands.

Includes:

- · MCore Pro mini-PC
- · MTouch Plus touch console
- · RoomSensor
- · UVC86 camera
- · 2x VCM35 array microphones
- · Yealink soundbar MSpeaker II
- · WPP30 wireless presentation pod

MVC S90 For Pro-AV Rooms (>18 people)





Flexible and Intelligent Pro-AV Solution

- · Easily divide or merge two spaces
- · Different angles with multi-camera
- · Presenter Tracking in multiple modes
- · Flexible audio options with Shure, Biamp, Extron, etc.
- · Supports Multi-Camera Intelliframe for a natural and effortless conversation experience

Includes:

- · MCore Pro mini-PC
- · MTouch Plus touch console
- · RoomSensor
- · AVHub
- · 2x UVC86 camera
- · 2x WPP30 wireless presentation pod
- · MVC-BYOD-Extender

Yealink MVC Series Teams Rooms System Specifications

Module	Features		MVC S90	MVC S60		
	Target Room Size	2	Pro-AV rooms	Medium rooms		
Components	Mini-PC	•	MCore Pro	MCore Pro		
	Touch Console & Sharing Device		Yealink MTouch Plus	Yealink MTouch Plus		
	USB Camera		2×Yealink UVC86 4K dual-eye intelligent camera	SmartVision 60 AIO intelligent camera		
	Audio		Flexible options	Built-in microphone arrays and speaker		
	Wireless Presentation		2×WPP30 wireless presentation pod	WPP30 (Optional)		
	MVC-BYOD-Extender		√	NA		
	CPU		11th-gen Intel i5 quad-core chipset			
	Memory		8GB (2*4GB)			
	Storage		128GB SSD			
	Video Output		3x HDMI, CEC supported			
Mini-PC	USB		4x USB3.0			
	Wi-Fi		√ √			
	Bluetooth		v √			
	Yealink MTouch Port		v √			
			v √			
	Cable Management Console		MTouch Plus touch console			
	Screen Size			s IPS screen		
	Screen Resolution		1920 x 1080			
	Bracket		Adjustable 50°~180° (Angle between screen and desktop:30°~70°)			
	Human Motion Sensor		Work with RoomSensor via BLE			
Touch	3.5mm Audio Port		₩OIK WILL TOO THOU THE STATE OF THE STATE O			
Console	USB-A Port		1x USB-A Port, connect to USB audio device if necessary			
	Content Sharing Resolution / Frame Rate		1080P / 30FPS			
	Video Input Interface for Content Sharing		HDMI & USB-C			
	Built-in Wi-Fi AP for Content Sharing		NDIVII & USB-C			
	Wireless Content Sharing		Work with the Yealink WPP30 wireless presentation pod			
	UVC Protocol		UVC 1.0	UVC 1.5		
	Zoom		20X HD zoom (12X optical, 1.7 digital)	5x digital Zoom		
	Resolution / Frame Rate		4K / 30FPS	10K Camera		
	Field of View (diagonal)		90°	360°		
Comoro	Pan/Tilt range		±100° Pan, +40°/-90° tilt	EPTZ		
Camera Features	-		√ × × × × × × × × × × × × × × × × × × ×	×		
	Auto Framing Speaker Tracking		√	\checkmark		
	Speaker Tracking Presenter Tracking		√	×		
	Presenter Tracking IntelliFrame (Multi-Stream People Feed)		Coming soon	\checkmark		
	Power Adapter		AC 100~240V input and DC 48V/0.7A output	AC 100~240V input and DC 15V/2.4A output		
			√ AC 100-240V Input and DC 40V/0./A output	100 2.101 parana 20 101/2.4A output		
AVHub	Camera Layout Maximum Number of Cameras		9	NA		
	Audio Ports		1x RCA-in, 1x RCA out 1x 6.3 mm line-in, 1x 6.3 mm line-out	- ·-·		
	714410 7 6716	Frequent Response	, , , , , , , , , , , , , , , , , , ,	100 Hz - 22K Hz		
	Speaker	RMS		5W		
		THD	MA	1%		
Audio		Maximum Speakers	NA	NA		
Features		.,		6 microphone arrays for meeting audio		
	Microphone			6+1 microphone arrays for Al audio		
	3rd Party DSP System Compatibility		Compatible with 3rd party DSP Systems including Shure, Biamp, Q-SYS, etc.	NA		
	Operating System	n	Windows 10 IoT Enterprise OS & License			
Preload			Windows 11 IoT Enterprise OS & License (in 2023Q4)			
	Microsoft Teams Rooms App Yealink RoomConnect Device Management Agent		√ √			
	Device Management Agent Windows Undate			√		
Device	Windows Update Yealink Device Management Platform/Cloud Service			v √		
	i latioilli/Oloud C		\checkmark			
Management	Microsoft SCCM			\checkmark		

Yealink MVC Series Teams Rooms System Specifications

Module	Features		MVC340	MVC400	MVC640	MVC860	MVC940		
Wiodale	i catares		WVCCC	10100400	1010040	WWOOO	~ ~		
	Target Room Siz	ze	Huddle rooms	Small rooms	Medium rooms	Large rooms	Extra-Large rooms		
	Mini-PC		Υ	ealink MCore Pro	Yealink	MCore Pro			
	Touch Console	& Sharing Device	Yealink MTouch E2	Yealink MTouch E2	Yealink MTouch E2	Yealink MTouch Plus	Yealink MTouch Plus		
Components	USB Camera		Yealink UVC34 all-in-one USB video bar	Yealink UVC40 all-in-one USB video bar	Yealink UVC84 4k12X optical PTZ camera	Yealink UVC86 4K Dual-Eye intelligent camera	2×Yealink UVC84 4K 12X optical PTZ camera		
Components	Audio		Built-in microphone arrays and speaker	Built-in microphone arrays and speaker	2x CPW65 wireless microphone Yealink soundbar MSpeaker II	2x VCM35 array microphones Yealink soundbar MSpeaker II	Flexible options		
	Wireless Preser	ntation	WPP30 (Optional)	WPP30 (Optional)	WPP30	WPP30	2×WPP30 wireless presentation pod		
	MVC-BYOD-Exte	ender	NA	Optional	Optional	Optional	Optional		
	CPU		11th-gen I	ntel i5 quad-core chipset	quad-core chipset				
	Memory			8GB (2*4GB)	(2*4GB)				
	Storage			128GB SSD	GB SSD				
	Video Output		3x H	DMI, CEC supported	EC supported				
Mini-PC	USB			4x USB3.0 4x USB3.0					
	EDID Built-in			√ 		V			
	Wi-Fi			√ √		√ -/			
	Bluetooth Yealink MTouch	Port		√ √	√ -/				
				v		v √			
	Cable Management Console		MTo	v ach E2 touch console			touch console		
	Screen Size			nches IPS screen		MTouch Plus touch console 11.6 inches IPS screen			
	Screen Resoluti	ion		1280 x 800			1920 x 1080		
	Bracket			justable 28° ~ 50°		Adjustable 50° ~ 180° (Angle between screen and desktop: 30° ~ 70°)			
	Human Motion S	Sensor		√ √			Work with RoomSensor via BLE		
Touch Console	3.5mm Audio Po	ort		\checkmark			$\sqrt{}$		
	USB-A Port		1x USB-A Port, conne	ect to USB audio device if necessary	o device if necessary 1x USB-A Port, connect to USB audio		JSB audio device if necessary		
	Content Sharing Resolution / Frame Rate			080P / 30FPS		1080P / 30FPS			
	Video Input Interface for Content Sharing			HDMI & USB-C		HDMI & USB-C			
	Built-in Wi-Fi AP for Content Sharing		\checkmark			√			
	Wireless Content Sharing		Work with the Yealin	k WPP30 wireless presentation pod		Work with the Yealink WPP30 wireless presentation pod			
	UVC Protocol		UVC 1.0	UVC 1.0	UVC 1.0	UVC 1.0	UVC 1.0		
	Zoom		5x digital zoom	8x digital zoom	12X optical	20X HD zoom (12X optical, 1.7 digital)	36X HD zoom (12X optical, 3X digital)		
	Resolution / Frame Rate		4K / 30FPS	4K / 30FPS	4K / 30FPS	4K / 30FPS	4K / 30FPS		
	Field of View (diagonal)		120°	133°	80°	90°	80°		
Camera Features	Pan/Tilt range		ETPZ	ETPZ	±100° Pan, +40°/-90° tilt	±100° Pan, +40°/-90° tilt	±100° Pan, +40°/-90° tilt		
	Auto Framing		×	V	×	V √	×		
	Speaker Tracking		×	×	×	√ √	×		
	Presenter Tracking		×	×	×	×	×		
	IntelliFrame (Multi Stream People Feed) Power Adapter		AC 100~240V input and DC 48V/0.7A output	AC 100~240V input and DC 48V/0.7A output	AC 100~240V input and DC 48V/0.7A output	AC 100~240V input and DC 48V/0.7A output	AC 100~240V input and DC 48V/0.7A output		
	Camera Layout		7.0 100 240V ilipatana 80 40V/0.77 oatpat	no iso ziorimpacana zo iovioni toacpac	7.6.166 2.167paraa56 167167.6a.par	7.6 for 2 for inpactalle 26 for for the apparent	√		
AVHub	Maximum Numb		NA	NA	NA	NA	9		
	Audio Ports						1x RCA-in, 1x RCA out 1x 6.3 mm line-in, 1x 6.3 mm line-out		
		Frequent Response			100 Hz - 20K Hz	100 Hz - 20K Hz			
	Speaker	RMS	Built-in 5W high fidelity speaker	Built-in 5W high fidelity speaker	10W	10W			
	opeakei	THD	balle il 1944 riigi riidelley speaker	bullt-iii 344 filigi f fluellity speakel	1.00%	1.00%			
		Maximum Speakers			Up to 4	Up to 4			
Audio Features			Built-in 8 microphone array	Built-in 8 MEMS microphone array	2x CPW65 wireless mics	2x VCM35 tabletop mics	NA		
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Microphone			- Indiana and a	Built-in 3-mic array	Built-in 3-mic array			
			15ft (4.5-meter) voice pickup range	20ft (6-meter) voice pickup range	360°, 10ft (3-meter) voice pickup range	360°, 10ft(3-meter) voice pickup range			
			, , , , , , ,		Cascade connection up to 2 units for CPW65	Cascade connection up to 8 units			
	3rd Party DSP System Compatibility		NA	NA	Compatible with 3rd party DSP systems including Shure, Biamp, Q-SYS, etc.	Compatible with 3rd party DSP systems including Shure, Biamp, Q-SYS, etc.	Compatible with 3rd party DSP systems including Shure, Biamp, Q-SYS, etc.		
	Operating System		Windows 10 IoT Enterprise OS & License Windows 11 IoT Enterprise OS & License (in 2023Q4) Windows 11 IoT Enterprise OS & License (in 2023Q4)						
Preload	Microsoft Teams Rooms App		windows from Enterprise OS & License (In 202504) windows from Enterprise OS & License (In 202504)						
	Yealink RoomConnect Device		v .						
	Management Agent			√		V			
	Windows Updat			\checkmark		\checkmark			
Device	Yealink Device Management Platform/Cloud Service			\checkmark		\checkmark			
Management	Microsoft SCCM			\checkmark		\checkmark			
	Microsoft Intune			\checkmark		\checkmark			

Yealink



YEALINK NETWORK TECHNOLOGY CO., LTD www.yealink.com | ucinfo@yealink.com